




## Continuous inkjet **9712: The true value of innovation**

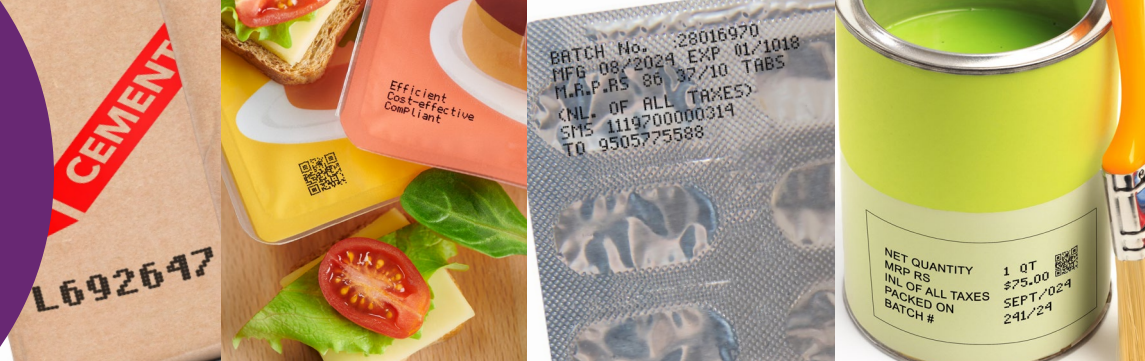

### Designed to MAX your coding experience

Markem-Imaje delivers flexibility and stability with our next-generation Bi-jet model, the 9712. Backed by four-plus decades of building dependable inkjet printers, the breakthrough 9712 incorporates the best of past, present and future-proof improvements so you can adapt easily to changing marketplace needs and **code more or at a faster pace.**

Meticulously engineered and qualified by the most modern methods, the 9712's latest enhancements bring you:

- Technology leaps grounded in time-tested industrial processes for maximized uptime, reduced maintenance  
Napredan dizajn sa pojednostavljenim interfejsom i modularnim komponentama za lako rukovanje, održavanje i popravku.
- Clear, customizable, traceable codes that meet customers' growing demand for supply chain visibility

## Key benefits

### Innovation

Advanced R&D backed by proven industrial processes and methods

- **Intelli'Inks** system ensures optimal coder performance and flexibility when coding different package materials.
- **Intelli'Swap** technology streamlines mechanicals down to swappable modules.
- **Jet Speed Control** technology automatically adjusts ink and printer variables to ensure drop placement, quality and code consistence. Every time.

### Efficiency

Prints two times faster or twice the amount of information


- **Compact print capacity** and **Bi-jet printhead properties** allow for extensive coding without altering product branding
- **Intelli'Design** process and a portfolio of rigorously developed ink formulations help reduce consumable consumption and VOC emissions by up to 50% while improving operator safety, well-being and TCO

### Digitalization

Convenience only a couple clicks away

- Remote services, including remote diagnostics, allow for a predictive analysis and therefore help maximize uptime, achieve OEE objectives
- Consumable and spare part supply through online portal
- Quick customizable 24-pin interface allows for easy integration in a 4.0 connected environment

# 9712 continuous inkjet specifications

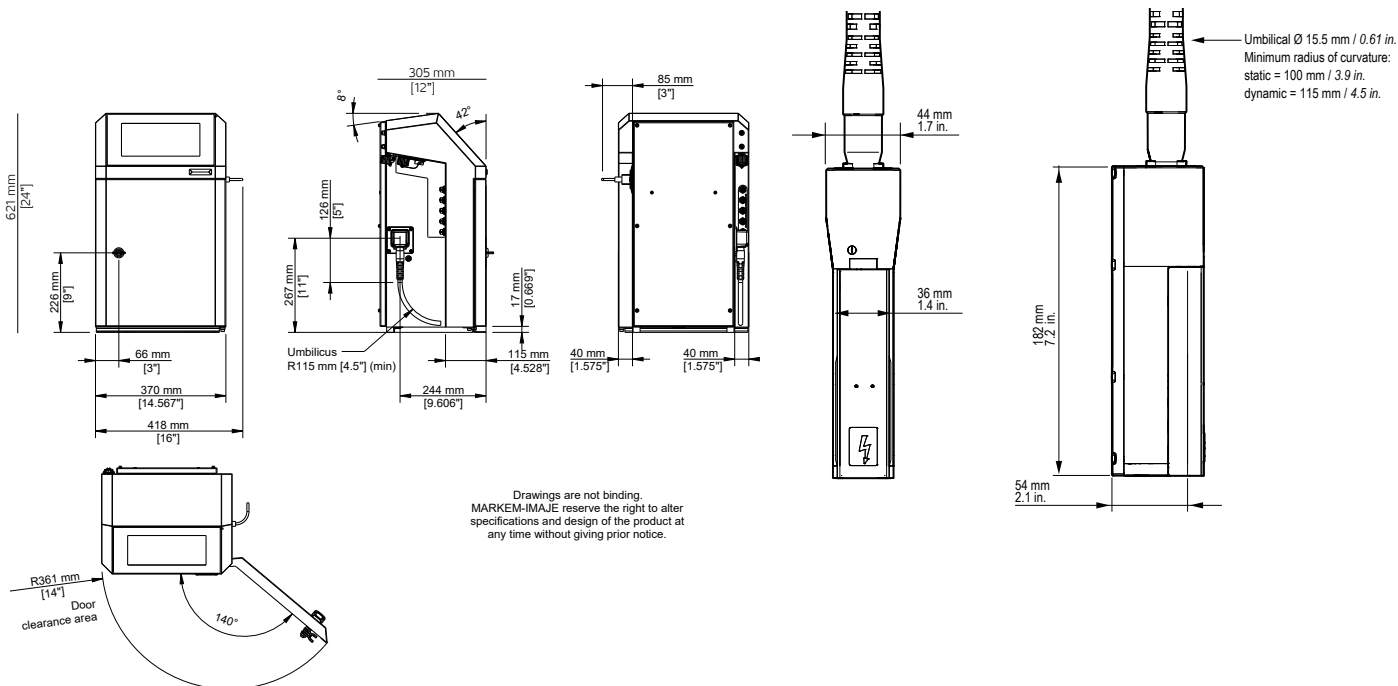

## Print features

Bi-jet printhead  
G head (printing resolution: 71 dpi)  
Up to 8 lines of print  
Print speed: up to 7.4 m/s  
Font height from 5 to 24 dots per jet  
Character height: from 1.2 to 8.2 mm per jet  
Wide choice of 1D and 2D barcodes: EAN 8/EAN 13/UPCA /UPCE barcodes, code 39, interleaved 2 of 5, Datamatrix, QRcode, Dotcode  
Wide choice of characters: Latin, Arabic, Cyrillic, Hebrew, Japanese, Chinese, Korean, etc.

## Other characteristics

Weight: 25 kg  
Table-top or vertical mounting  
Ultra-flexible 3-meter umbilical cable  
Stainless steel cabinet and printhead case  
Dust/water ingress protection rating: IP56 requiring no plant air  
Operating temperature range: 32 °F to 122 °F (0 °C to 50 °C) depending on ink used  
Humidity: 10 to 90% non-condensing  
Electrical power supply: 100-240 V; 1,6 A; frequency 50/60 Hz

## Operations

WYSIWYG 10-inch capacitive color touchscreen: real-time display of remaining print capacity expressed in hours and number of messages; integrated assistance and alert system; simplified message printing and management; creation of user profiles; tracking of consumption and printer availability  
Message library (up to 1,000 messages)  
Automatic selection of fonts, depending on print speed and printhead/object distance  
Specific date management (rounding date function)  
Parent/child connectivity  
Jet Speed Control guarantees marking quality  
Printhead with embedded intelligence for high marking quality and reduced maintenance  
Broad range of inks: multi-use, high performance; alcohol based, ketone-free and MEK-free inks  
Sealed 0.8-liter cartridges with fool proofing system  
Compact and modular ink circuit for better thermal management and controlled additive consumption  
100% front access modular ink circuit for a simplified preventive maintenance  
Remote Services including our Virtual Assistant for 24/7 self-troubleshooting and "how to" videos  
Quick connect/disconnect of accessories (photocell, alarm and encoder)  
Enhanced native connectivity including USB, Ethernet, serial and a configurable M12 connector for I/O

## Options

Ultra-flexible 2 or 6-meter umbilical cable  
Ultimate water and dust protection (plant air required)  
Printhead pressurization kit  
Many I/O possibilities including a configurable single point connector (24 pins)

## Accessories

Wide range of accessories  
Printer supports: stands (stainless steel or aluminum), table or wall mounting brackets  
Printhead supports: stand (stainless steel) and choice of brackets  
Photocells  
Encoders  
Alarm beacons (24 V)  
Set of pre-cabled connectors M12, Ethernet IP66

## Software

Fully compatible with CoLOS® Version 6.4 Service Pack onwards  
Logo creation with CoLOS® Graphics software

## Remote services

Markem-Imaje Virtual Assistant for an intelligent self-support solution  
Live helpdesk support with remote video capabilities  
Connected Printer Services, based on a secured IoT cloud infrastructure\*

\* Check availability in your country

  
markem·imaje  
a DOVER company

9, rue Gaspard Monge - B.P. 110  
26501 Bourg-lès-Valence Cedex France  
+33 (0) 4 75 75 55 00  
[markem-imaje.com](http://markem-imaje.com)